

Threaded pins with left-hand and right-hand threads

for turnbuckles, galvanised

Thread	Length [mm]	Part no.	Sales unit	Pack unit
M8	50	114226	100	Pieces
M10	60	113840		
M12	70	113992		
	150	113921		
M16	210	114040	50	



Hex connectors


with cross hole, galvanised

Application

- For the extension and joining of threaded rods and pins

Your advantages

- Robust, galvanised, threaded pipe coupling with hexagonal section and a cross hole
- Two check holes for verifying the required screw-in depth of the threaded ends

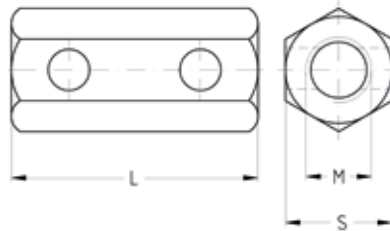


Thread	Length L [mm]	Hole diameter [mm]	Spanner width [mm]	Part no.	Sales unit	Pack unit
M8	30	5	13	113319	100	Pieces
M10			17	113322		
M12	35			113328	50	
M16	50	-	24	113307		

Hanger sockets with inner thread and reinforcement ring

with round hole, galvanised

Thread	Hole diameter [mm]	Max. recommended tensile load [N]	Dimensions [mm]					Part no.	Sales unit	Pack unit
			C	D	L	L1	b			
M8	8.5	3,600	14	8.5	50	29	25	106600	100	Pieces
M10	10.5	4,600	15	10.5	52	30	30	106597		
M12	13	3,600		13				106598		



Hanger sockets with inner thread and reinforcement ring 45°

with round hole, galvanised

Thread	Hole diameter [mm]	Max. recommended tensile load [N]	Dimensions [mm]					Part no.	Sales unit	Pack unit
			C	D	L	L1	b			
M8	8.5	1,700	14	8.5	50	29	25	174423	100	Pieces
M10	10.5	2,700	15	10.5	52	30	30	174424		
M12	13	1,700		13				174450		

