

Single bossed clamps

with DÄMMGULAST® black, stainless steel

Application

- Suitable for attachments in industrial areas as well as in air-conditioning, ventilation and sanitary areas
- For indoor and outdoor use

Your advantages

- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter


- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Vibration control lining DÄMMGULAST® black: average vibration improvement of up to 18 dB(A)



Features



Size	Max. recommended load [N]
1/4" - 1 1/2"	1,300
54 mm - 3"	1,500
102 mm - 6"	2,000

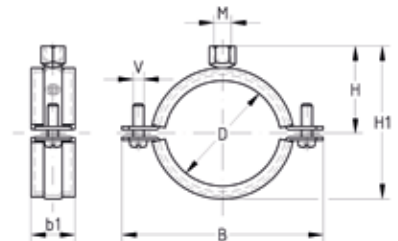

Connecting thread M	Size		Clamping range [mm]	Material	b1	Dimensions [mm]			V	Part no.	Sales unit	Pack unit	
	[inch]	[mm]				B	H	H1					
M8/M10	1/2"		12 - 14	V2A	20	54	20	33	M6 x 16	175981	150	Pieces	
	3/8"		15 - 19			59	22	37		175982			
	1/2"		20 - 23			63	24	41		175983			100
	3/4"		25 - 28			69	27	46		175984			
	1"		32 - 35			76	30	53		175985			
	1 1/4"		40 - 43			84	35	62		M6 x 20	175986		50
	1 1/2"		44 - 49			90	38	68			175987		
		54	50 - 56			103	52	87			175988		
	2"		57 - 61			108	54	92			175989		
		63	63 - 67			114	57	98			175990		
		70	70 - 73			121	60	104	175991	25			
	2 1/2"		74 - 80			127	64	111	175992				
	3"		83 - 91			138	69	122	175993				
		102	101 - 106			160	78	140	M6 x 25		175994		
	4"		108 - 114			168	82	148			175995		
		125	123 - 127			180	88	159			175996		
		133	131 - 135			190	93	169			175997		
		136	136 - 139			194	95	173			175998		
	5"		140 - 144			199	97	178	175999				
		160	159 - 163			218	107	197	176000				
6"		165 - 169	224	110	203	176001							

