

Single bossed clamps

without lining, stainless steel

Application

- Suitable for installations without vibration control requirements
- Suitable for attachments in industrial areas as well as in air-conditioning, ventilation and sanitary areas
- For indoor and outdoor use

Your advantages


- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers



Features



Size	Max. recommended load [N]
1/4" - 1 1/2"	1,300
54 mm - 3"	1,500
102 mm - 6"	2,000

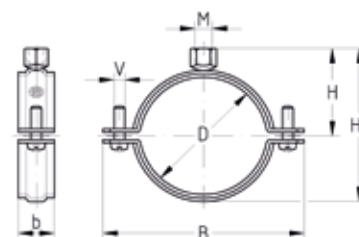

Connecting thread M	Size		Clamping range [mm]	Material	Dimensions [mm]					Part no.	Sales unit	Pack unit		
	[inch]	[mm]			b	B	H	H1	V					
M8/M10	1/4"		12 - 14	V4A	20	47	16	26	M6 x 16	176023	150	Pieces		
	3/8"		14 - 18			50	18	30		176024				
	1/2"		20 - 25			57	22	37		176025			100	
	3/4"		26 - 31			64	25	43		176026				
	1"		32 - 36			69	27	48		176027	M6 x 20		176028	50
		40	38 - 43			76	31	55		176029				
	1 1/4"		40 - 46			79	32	58		176030				
	1 1/2"		47 - 51			85	35	63		176031				
		54	52 - 56			94	47	77		176032				
	2"		57 - 61			100	50	84		176033				
		63	63 - 67			105	52	89	176034					
		70	70 - 73			111	55	95	176035					
	2 1/2"		74 - 80			118	59	102	176036					
	3"		83 - 91			129	64	113	176037	M6 x 25	176038		25	
		102	101 - 106			149	72	129	176039					
	4"		108 - 114			157	76	137	176040					
		125	118 - 125			168	82	148	176041					
		133	131 - 135			179	87	158	176042					
	5"		136 - 142			185	90	165	176043					
		160	159 - 163			207	101	186						
6"		165 - 169	213	104	192									

