

Pipe clamps HS


with DÄMMGULAST® NBR-oil proof, hot-dip galvanised

Application

- Clamp with connecting nut for mounting on a bolted system sub-structure on naval vessels

Your advantages

- Clamp for dynamic loads on naval vessels
- Connection nut welded all around
- Lining DÄMMGULAST® black resistant to oils and fats
- DÄMMGULAST® vibration control lining with green identification stripe: average sound level improvement up to 18 dB(A)
- Material S355J2+N surface protection, thermally hot-dip galvanised

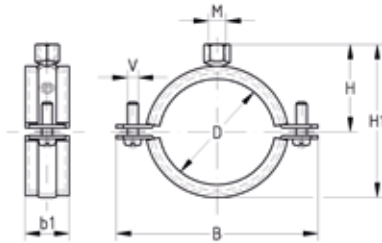


HS-90°



HS-45°

Features



Connecting thread M	Pipe outer Ø D [mm]	Nominal size DN	Hexagon head bolt	Dimensions [mm]		Design HS-90° Part no.	Design HS-45° Part no.	Sales unit	Pack unit
				b1	s				
M12	20	16	M10 x 25	30	3	145511		1	Pieces
	22	20				145510			
	25					145509			
	28	25				145508			
	35	32				145506			
	38					145505			
	42 - 42.4					145504	152129		
M16	44.5	40	M12 x 30	40	4	145503		1	Pieces
	48.3					145502	152131		
	53 - 54	50				145501	152132		
	57					145500	152133		
	60.3					145499			
	73	70				145498	152135		
	76 - 76.1					145497	152136		
¾"	88.9 - 89	80	M12 x 30	50	5	145496	152137	1	Pieces
	102	100				145495	152138		
	108					145494			
	114.3					145493	152140		
1"	133	125	M12 x 30	50	5	145492		1	Pieces
	139.7					145491			
	159	150				152721			
	168.3					152722			



Tested by the Bundeswehr Technical Centre for Ships and Naval Weapons (Wehrtechnische Dienststelle für Schiffe und Marinewaffen) WTD71.

These products are manufactured to order. Minimum quantities and delivery time on request.