

Girder clamps with clearance hole


type TKC, galvanised

Application

- For attachment of pipelines, air ducts and sprinkler systems on steel girders
- For suspension of threaded pins and threaded rods for the attachment of pipe clamps or crossbeams made with MPC-Support channels

Your advantages

- Attachment on girder without welding or drilling
- Subsequent alignment on the girder possible
- High loading capacity
- Quick, subsequent height adjustment of the threaded rods at the non-threaded through-hole

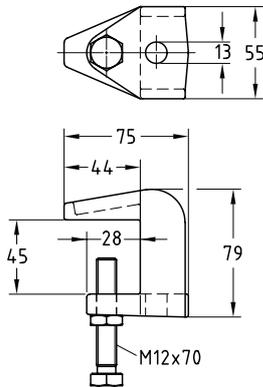

Features

Max. recommended load [N]		3,500			
Design	Size	Clamping thickness S [mm]	Part no.	Sales unit	Pack unit
with clearance hole	M12	6 - 42	130241	1	Pieces