

DÄMMGULAST® Resilient pad galvanised

Application

- Vibration control of traverses and pipe bridges made of MPC-Support channels

Your advantages


- Effective structure-borne vibration control for many installation situations
- Bushing to prevent metal contact between screws and mounted object
- Very simple installation without additional work
- Average sound level improvement of up to 17 dB(A)
- Ideal combination with DÄMMGULAST® Washers for vibration-isolated fitting of MPC-Support channels



Features



Average vibration reduction [dB(A)]	17
Max. recommended load [N]	1,000

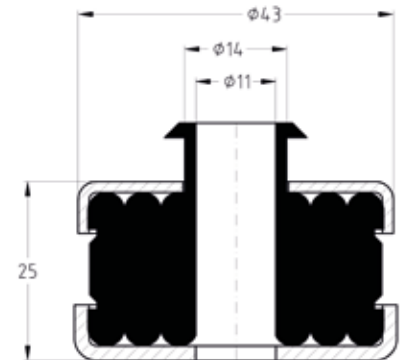

For thread	Part no.	Sales unit	Pack unit
M8/M10	107083	50	Pieces

