

### Single bossed clamps

with DÄMMGULAST® blue, galvanised

#### Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for fixings in shipbuilding and industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

#### Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- DÄMMGULAST® Vibration control lining with blue indicator stripe, fire class B1 in accordance with DIN 4102, non-dripping in a fire


- Average sound level improvement up to 16.5 dB(A)
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B



#### Features



Size	Max. recommended load [N]
3/8" - 2"	1,500
70 - 83 mm	2,200
3" - 160 mm	2,900
180 - 200 mm	3,200
212 - 225 mm	5,800

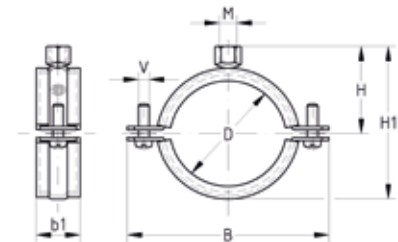

Connecting thread	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit	
	[inch]	[mm]		b1	B	H	H1	V				
M	M8/M10	3/8"	14 - 20	23	64	35.5	55	M6 x 20	151466	100	Pieces	
		1/2"	21 - 26		71	38.5	61		151467			
		3/4"	26 - 30		75	40.5	65		151468			
		1"	31 - 38		81	43.5	71		151469			
		1 1/4"	40 - 47		91	48.5	81		151471			
		1 1/2"	48 - 54		100	52.5	89		151472			
	M10/M12	57	2"	54 - 60	28	105	55	94	M6 x 25	151473	50	
			70"	60 - 66		111	58	100		151474		
			2 1/2"	68 - 73		126	62.5	109		151476		
			3"	73 - 80		131	65	114		151477		
			83	82 - 87		142	70	124		151478		
			110	87 - 94		146	72	128		151479		
		8"	102	99 - 104	157	77.5	139	151480	M8 x 35	151481	25	
			110	105 - 112	166	82	148	151482				
			125	112 - 118	172	85	154	151483				
			133	122 - 128	182	90	164	151484				
			144	132 - 137	191	94.5	173	151485				
			150	137 - 142	196	97	178	151486				
8"	144	142 - 148	202	100	184	151487	M8 x 40	151488	25			
	160	149 - 156	210	104	192	151488						
	160	159 - 164	218	108	200	151516						
	180	177 - 183	235	122	223	151517						
	200	197 - 203	256	132	243	151518						
	212	208 - 214	284	138.5	256	151519						
8"	212	217 - 225	295	144	267	151520	M10 x 40	151519	25			
	225	225 - 232	304	147.5	274	151520						



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.