

Single bossed clamps with DÄMMGULAST® yellow, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for fixings in shipbuilding and industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter


- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- DÄMMGULAST® vibration control lining with yellow identification stripe: average sound level improvement up to 22 dB(A)
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B



Features



Size	Max. recommended load [N]
3/8" - 2"	1,700
70 - 83 mm	2,200
3" - 6"	2,900
170 - 200 mm	3,500
212 - 225 mm	5,800

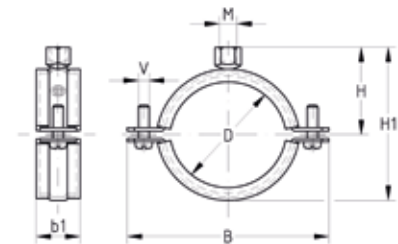

Connecting thread	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M	M8/M10	6	6 - 9	23	50	27.5	39	M6 x 20	161639	100	Pieces
			10 - 13		57	30.5	45		161640		
		14 - 20	64		35.5	55	151359				
		21 - 26	71		38.5	61	151360				
		26 - 30	75		40.5	65	151361				
		31 - 38	81		43.5	71	151362				
		40 - 47	91		48.5	81	151364				
		48 - 54	100		52.5	89	151365				
		54 - 60	105		55	94	151366				
		60 - 66	111		58	100	151367				
		68 - 73	126		62.5	109	151369				
		73 - 80	131		65	114	151370				
		82 - 87	142		70	124	151371				
		87 - 94	146		72	128	151372				
		99 - 104	157		77.5	139	151373				
		105 - 112	166		82	148	151374				
		112 - 118	172		85	154	151375				
		122 - 128	182		90	164	151376				
		132 - 137	191		94.5	173	151377				
		137 - 142	196		97	178	151378				
142 - 148	202	100	184	151379							
149 - 156	210	104	192	151380							
159 - 164	218	108	200	151422							
164 - 169	223	110.5	205	151423							
169 - 172	225	111.5	207	151424							

! Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

Single bossed clamps with DÄMMGULAST® yellow, galvanised

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit		
	[inch]	[mm]		b1	B	H	H1	V					
M10/M12	3/8"		14 - 20	23	64	40.5	60	M6 x 20	151425	100	Pieces		
	1/2"		21 - 26		71	43.5	66		M6 x 25			151426	
	3/4"		26 - 30		75	45.5	70					151427	
	1"		31 - 38		81	48.5	76	151428					
	1 1/4"		40 - 47		91	53.5	86	151430					
	1 1/2"		48 - 54		100	57.5	94	151431					
		57	54 - 60		105	60	99	151432					
	2"		60 - 66		111	63	105	151433					
		70	68 - 73		28	126	67.5	114	M8 x 35			151435	50
	2 1/2"		73 - 80			131	70	119				151436	
		83	82 - 87			142	75	129				151437	
	3"		87 - 94			146	77	133	M8 x 40			151438	
		102	99 - 104	157		82.5	144	151439					
		110	105 - 112	166		87	153	151440					
	4"		112 - 118	172		90	159	151441					
		125	122 - 128	182		95	169	151442					
		133	132 - 137	191		99.5	178	151443					
	5"		137 - 142	196		102	183	151444					
		150	149 - 156	210		109	197	151446					
		160	159 - 164	218		113	205	151447					
	6"		164 - 169	223	115.5	210	151448						
		170	169 - 172	225	116.5	212	151449						
		180	177 - 183	235	122	223	151450						
		200	197 - 203	256	132	243	151451						
	212	208 - 214	46	284	138.5	256	M10 x 40	151452	25				
8"		217 - 225		295	144	267		151453					
	225	225 - 232		304	147.5	274		151454					
	150	149 - 156		28	210	113		201		M8 x 40	151457	50	
	160	159 - 164	218		117	209	151458						
6"		164 - 169	223		119,5	214	151459						
	170	169 - 172	225		120,5	216	151460						
	180	177 - 183	235		126	227	151461						
	200	197 - 203	256		136	247	151462						
	212	208 - 214	46		284	142,5	260	M10 x 40	151463	25			
8"		217 - 225			295	148	271		151464				



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.