

### Single bossed clamps

with DÄMMGULAST® red, galvanised

#### Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for fixings in shipbuilding and industrial areas
- Suitable for fastening of drinking water and heating pipes as well as for thermal oil pipes
- Attachment of pipelines in increased temperature ranges
- For indoor use

#### Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- With high-temperature resistant DÄMMGULAST® Vibration control lining red


- The high-quality DÄMMGULAST® section maintains its properties in the temperature range -60 °C to +200 °C
- Average sound level improvement up to 24 dB(A)
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B



#### Features



Size	Max. recommended load [N]
3/8" - 2"	1,300
70 - 83 mm	1,900
3" - 4"	2,200
125 mm - 6"	2,700
170 - 200 mm	3,500
212 mm - 8"	5,300

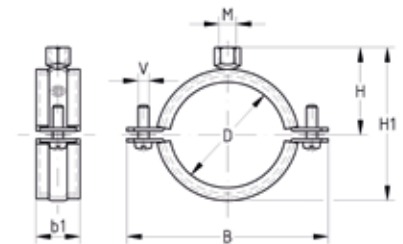

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit	
	[inch]	[mm]		b1	B	H	H1	V				
M8/M10	3/8"		14 - 20	23	64	35.5	55	M6 x 20	151532	100	Pieces	
	1/2"		21 - 26		71	38.5	61		151533			
	3/4"		26 - 30		75	40.5	65		151534			
	1"		31 - 38		81	43.5	71		M6 x 25			151535
	1 1/4"		40 - 47		91	48.5	81		151537			
	1 1/2"		48 - 54		100	52.5	89		151538			
		57	54 - 60	105	55	94	151539					
	2"		60 - 66	111	58	100	151540					
		70	68 - 73	28	126	62.5	109	M8 x 35	151542	50		
	2 1/2"		73 - 80		131	65	114		151543			
	83	82 - 87	142		70	124	151544					
3"		87 - 94	146		72	128	M8 x 40		151545			

**!** Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

### Single bossed clamps

with DÄMMGULAST® red, galvanised

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M8/M10		102	99 - 104	28	157	77.5	139	M8 x 40	151546	50	Pieces
		110	105 - 112		166	82	148		151547		
	4"		112 - 118		172	85	154		151548		
		125	122 - 128		182	90	164		151549		
		133	132 - 137		191	94.5	173		151550		
	5"		137 - 142		196	97	178		151551		
		144	142 - 148		202	100	184		151552		
		150	149 - 156		210	104	192		151553		
		160	159 - 164		218	108	200		151554		
		6"			164 - 169	223	110.5		205		
M10/M12	1"		31 - 38	23	81	48.5	76	M6 x 25	151560	100	
	1¼"		40 - 47		91	53.5	86		151562		
	1½"		48 - 54		100	57.5	94		151563		
		57	54 - 60		105	60	99		151564		
	2"		60 - 66		111	63	105		151565		
		70	68 - 73	28	126	67.5	114	M8 x 35	151567	25	
	2½"		73 - 80		131	70	119		151568		
		83	82 - 87		142	75	129		151569		
	3"		87 - 94		146	77	133		151570		
		102	99 - 104		157	82.5	144		151571		
		110	105 - 112	166	87	153	151572				
	4"		112 - 118	172	90	159	151573				
		125	122 - 128	182	95	169	151574				
		133	132 - 137	191	99.5	178	151575				
	5"		137 - 142	196	102	183	151576				
		144	142 - 148	202	105	189	151577				
		150	149 - 156	210	109	197	151578				
		160	159 - 164	218	113	205	151579				
	6"		164 - 169	223	115.5	210	151580				
		170	169 - 172	225	116.5	212	151581				
		180	177 - 183	235	122	223	151582				
		200	197 - 203	256	132	243	151583				
		212	208 - 214	46	284	138.5	256	M10 x 40	151584		
8"		217 - 225	295		144	267	151585				



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.