

### Duct clamps without lining, galvanised

#### Application

- For attachment of spiral-seam pipes

#### Your advantages


- Manufactured to suit air duct dimensions
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter

- Locking screws with combi-cross slit head and captive washer convenient for screwdrivers and nominal pipe size of up to 400 mm, M10 Hexagon screws for pipe sizes from 450 mm and upwards
- Manufactured to suite connecting thread M8/M10



#### Features

Max. recommended load [N]	500
---------------------------	-----

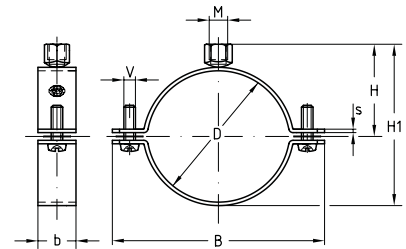

Nominal size DN [mm]	Connecting thread	Dimensions [mm]						Part no.	Sales unit	Pack unit				
		B	H	H1	b	s	V							
80	M8/M10	119	50	91	20	1.2	M6	175917	50	Pieces				
90		129	55	101										
100		139	60	111										
112		151	66	123										
125		164	72	136										
140		179	80	151										
150		189	85	161										
160		199	90	171										
180		219	100	191										
200		239	110	211										
224		272	131	247										
250		298	144	273										
280		328	159	303										
300		349	170	324										
315		364	177	339										
355		404	197	379										
400		M10	449	220				424			25	2	115687	1
450	515		245	474										
500	565		270	524										
560	625		300	584										
600	665		320	624										
630	696		335	655										
710	776		375	735										
800	866		420	825										
						3		115710						
								115711						
								115716						

Duct clamps can be produced in all other pipe sizes and types according to customer specifications.

For stainless steel version (without lining or with DÄMMGULAST® Junior lining) please refer to chapter „Stainless steel“.