

MPR-Hammer head fasteners

galvanised




Application

- For time-saving, efficient attachment of pipe clamps to MPR-Support channels
- For indoor use

Your advantages


- Easy and fast assembly in the rail slot
- Lateral adjustment at any time, allows perfect alignment of the pipeline after installation
- Various lengths and thread diameters can be combined within the same channel
- Interlocking threaded plate for secure positive connection in the rail slot of the MPR-Support channels



Features



Material thickness of support channel [mm]	Connecting thread	Max. recommended tensile load Fz [N]	Tightening torque [Nm]
1.5	M8	3,100	9
	M10		17
	M12		29
2.0	M8	4,500	9
	M10		17
	M12		29
	M16		29
2.5	M8	5,000	9
	M10		17
	M12		29
	M16		29

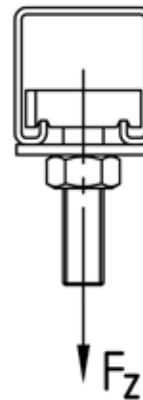

For profiles	Connecting thread	Length [mm]	Usable thread length L [mm]	Part no.	Sales unit	Pack unit	
41/21/1.5, 41/21/2.0, 41/41/2.0, 41/41/2.5, 41/62/2.5, 41/42/2.0, 41/82/2.0, 41/82/2.5, 41/124/2.5	M8	35	10	151057	50	Pieces	
		40	15	151058			
		50	25	151059			
		80	55	151060			
		100	75	151061			
	M10	35	8	151062			25
		40	13	151063			
		55	28	151064			
		60	33	151065			
		80	53	151066			
41/21/1.5, 41/21/2.0, 41/41/2.0, 41/41/2.5, 41/62/2.5, 41/82/2.0, 41/82/2.5, 41/124/2.5	M12	40	9	151069	50		
		55	24	151070			
41/41/2.0, 41/41/2.5, 41/62/2.5, 41/82/2.0, 41/82/2.5, 41/124/2.5	M16	100	65	151075	25		