

MPR-Connection lock type S+ BV galvanised


Application

- For connecting type S+ mounting parts with MPR-Support channels
- For indoor use

Your advantages

- Time-saving - fast and powerful frictional connection of type S+ mounting parts with MPR-Support channels

- Easy - simply slot into the type S+ mounting part and tighten the connection lock by turning 90°
- Secure interlocking design for a positive connection with the MPR-Support channels
- No wrench or auxiliary tool needed to hold in place
- No confusion - one size fits all type S+ mounting parts
- Optimized regarding smoke density and toxicity

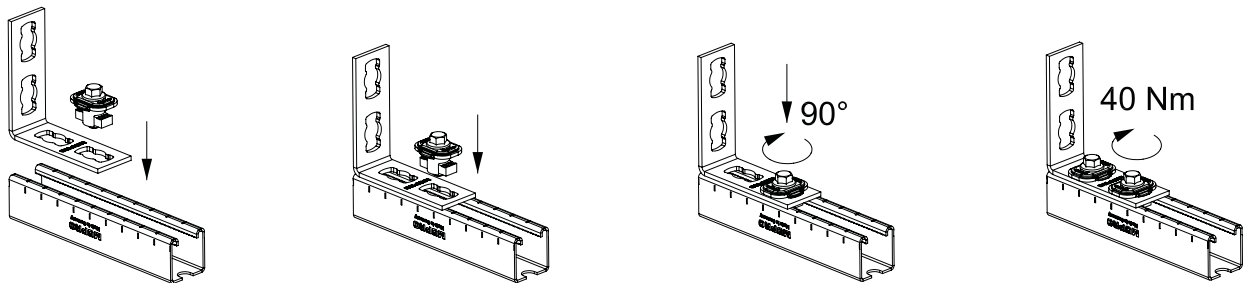

Features



Material thickness of support channel [mm]	Max. recommended tensile load Fz [N]	Max. recommended load lateral F _o [N]	Tightening torque [Nm]
1.5	3,500	2,500	40
2.0	4,500	4,000	
2.5	5,000		

For profiles	Thread	Spanner width [SW]	Part no.	Sales unit	Pack unit
41/21-41/124	M10	13	166351	50	Pieces