

### MPT-Saddle supports



hot-dip galvanised

#### Application

- Stable saddle supports in three sizes for accommodating MPT-Support profiles Q50, Q80, Q100 or Q150 for wall, floor, and ceiling connection

#### Your advantages

- For fast and efficient mounting of cross-beams of MPT-Support profiles
- Stable baseplate for safe fastening on the structural element
- Fully welded version of the grooved support saddle ensures high dimensional stability of the flange

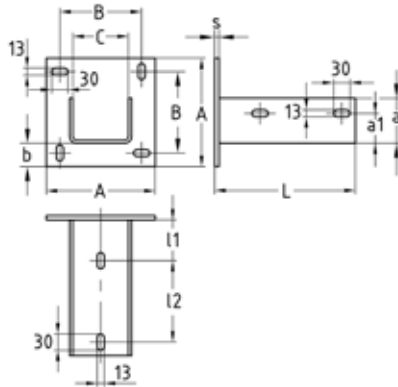

#### Features

For profiles	Max. recommended tensile load $F_z$ [N]	Tightening torque [Nm]
Q50-2.5	12,500	65
Q80-2.0		
Q100-2.5, Q100-3.5, Q150-2.5	15,000	

For profiles	Dimensions [mm]										Weight [kg]	Part no.	Sales unit	Pack unit
	a	a1	b	l1	l2	s	A	B	C	L				
Q50-2.5	57	37	72	75	150	8	200	150	102	258	4.85	131837	1	Pieces
Q80-2.0	73	47	43				180	130	82		4.478	167934		
Q100-2.5, Q100-3.5, Q150-2.5	83	54					200	150	102		5.55	131635		