

### MPT-Support profile connectors

hot-dip galvanised

#### Application


- Axial connection of MPT-Support profiles

#### Your advantages


- Safe and form-locking connection of MPT-Support profiles by inserting the support profile connection into the ends of the support profiles to be connected (Q80 and Q150) or by connecting from outside (Q100)



For profile Q80

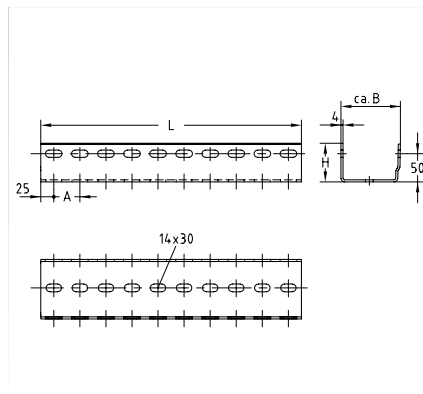

For profile Q100

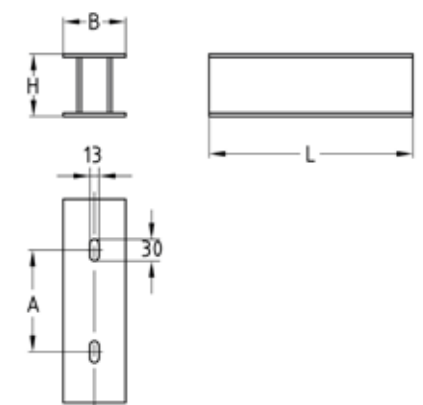


For profile Q80, Q150, schematic sketch (original may vary)



For profile Q150

| For profiles       | Length L [mm] | Dimensions [mm] |     |     | Weight [kg] | Part no. | Sales unit | Pack unit |
|--------------------|---------------|-----------------|-----|-----|-------------|----------|------------|-----------|
|                    |               | A               | B   | H   |             |          |            |           |
| Q80-2.0            | 550           | 150             | 73  | 73  | 3.239       | 167938   | 1          | Pieces    |
| Q100-2.5, Q100-3.5 | 500           | 50              | 115 | 74  | 7.14        | 176056   |            | Set       |
| Q150-2.5           | 550           | 150             | 92  | 140 | 9.25        | 167077   |            | Pieces    |

 Article 176056 is supplied in a set with two U-profiles.