


### Threaded pins with left-hand and right-hand threads

for turnbuckles, galvanised

Thread	Length [mm]	Part no.	Sales unit	Pack unit
M8	50	114226	100	Pieces
M10	60	113840		
M12	70	113992		
	150	113921	50	
M16	210	114040		



### Hex connectors


with cross hole, galvanised

#### Application

- For the extension and joining of threaded rods and pins

#### Your advantages

- Robust, galvanised, threaded pipe coupling with hexagonal section and a cross hole
- Two check holes for verifying the required screw-in depth of the threaded ends

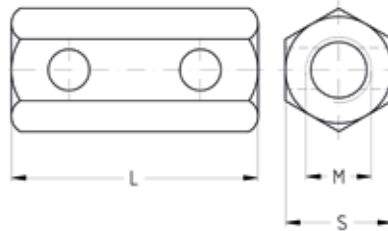


Thread	Length L [mm]	Hole diameter [mm]	Spanner width [mm]	Part no.	Sales unit	Pack unit
M8	30	5	13	113319	100	Pieces
M10			17	113322		
M12	35			113328	50	
M16	50	-	24	113307		

### Hanger sockets with inner thread and reinforcement ring

with round hole, galvanised

Thread	Hole diameter [mm]	Max. recommended tensile load [N]	Dimensions [mm]					Part no.	Sales unit	Pack unit
			C	D	L	L1	b			
M8	8.5	3,600	14	8.5	50	29	25	106600	100	Pieces
M10	10.5	4,600	15	10.5	52	30	30	106597		
M12	13	3,600		13				106598		



### Hanger sockets with inner thread and reinforcement ring 45°

with round hole, galvanised

Thread	Hole diameter [mm]	Max. recommended tensile load [N]	Dimensions [mm]					Part no.	Sales unit	Pack unit
			C	D	L	L1	b			
M8	8.5	1,700	14	8.5	50	29	25	174423	100	Pieces
M10	10.5	2,700	15	10.5	52	30	30	174424		
M12	13	1,700		13				174450		

