

### STATO® Brackets galvanised

#### Application

- Stable support system with high load-bearing capacity for pipe installations
- Ideal pipe anchor point in combination with STATO® Clamps without lining
- Ideal as height adjustable subframe for anchor and expansion assemblies
- Ideal as an anchor point for insulated chilled water pipes in combination with MÜPRO® Wooden blocks and STATO® Clamps


#### Your advantages

- Continuously adjustable in height and slope
- As height adjustment for waste water pipes or to compensate for unevennesses
- Can be fitted with up to 3 STATO® Clamps in case of heavy loads
- Especially suitable for heavy pipes with large wall clearances
- Can be used as a bearing block, adjustable in height and slope


STATO® Brackets 1 kit consisting of:  
 4 STATO® Angle pieces,  
 6 Coach bolts M12,  
 6 Hexagonal nuts M12,  
 6 Washers for M12.  
 All parts are galvanised.




STATO® Clamps with adjustable STATO® Bracket

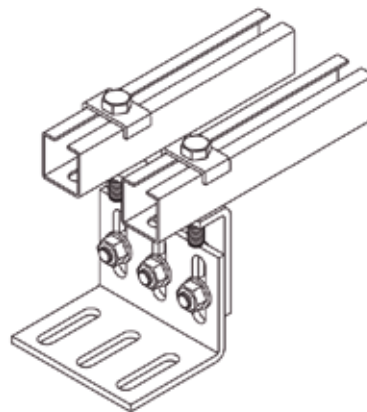


Height adjustable sub-frame for anchor and expansion assemblies

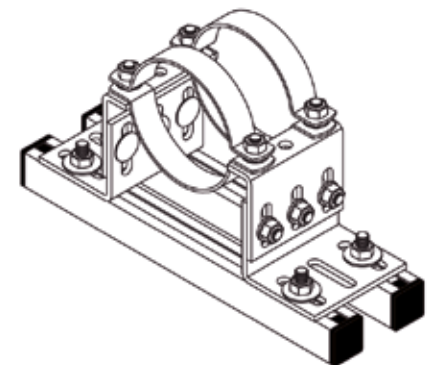


Free slidable elevation

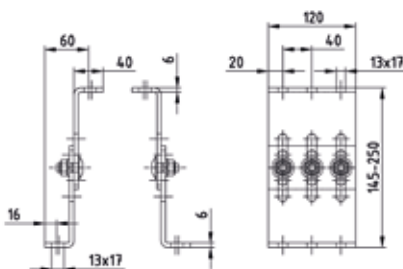

Slim version

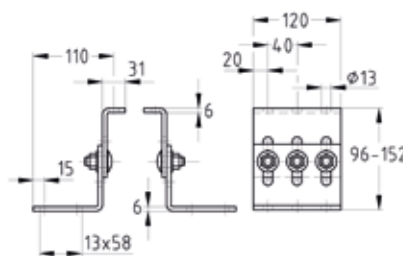

Standard version

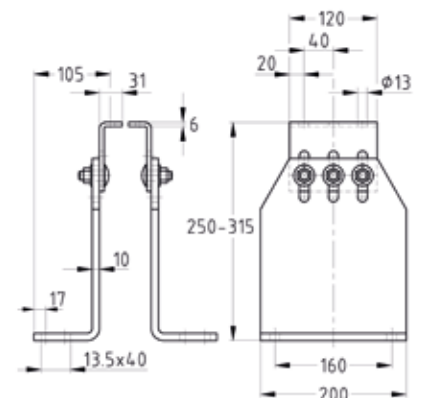


Heavy-duty version, larger distance from structure

Design	Overall height [mm]	Adjustment range [mm]	Part no.	Sales unit	Pack unit
Slim version	145 - 250	105	<b>129171</b>	1	Pieces
Standard version	96 - 152	56	<b>129167</b>	5	
Heavy-duty version	250 - 315	65	<b>129176</b>	1	

## STATO® Brackets galvanised

### Features

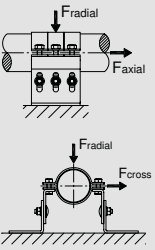Design		Slim version	Standard version	Heavy-duty version	Tightening torque [Nm] valid for M12, steel pipes without coating
Max. recommended load [N]	axial	5,500 per clamp	5,500 per clamp	5,500 per clamp	75
	cross	Overall height min.			
		6,000	8,000	7,000	
	radial	Overall height max.			
		3,000	6,000	7,000	
		Overall height min.	25,000	25,000	
		20,000			
Overall height max.					
10,000					