

STATO® Brackets

hot-dip galvanised

Application


- Stable support system with high load-bearing capacity for pipe installations
- Ideal pipe anchor point in combination with STATO® Clamps without lining
- Ideal as height adjustable subframe for anchor and expansion assemblies
- Ideal as an anchor point for insulated chilled water pipes in combination with MÜPRO® Wooden blocks and STATO® Clamps

Your advantages


- Continuously adjustable in height and slope
- As height adjustment for waste water pipes or to compensate for unevennesses
- Can be fitted with up to 3 STATO® Clamps in case of heavy loads
- Especially suitable for heavy pipes with large wall clearances
- Can be used as a bearing block, adjustable in height and slope



STATO® Clamps with adjustable STATO® Bracket

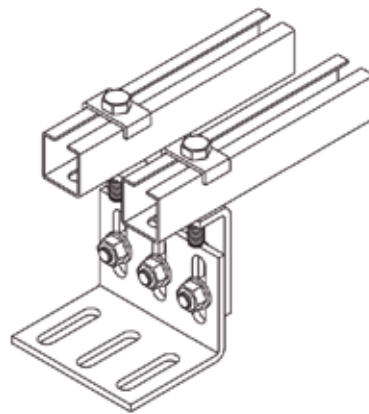


Height adjustable sub-frame for anchor and expansion assemblies

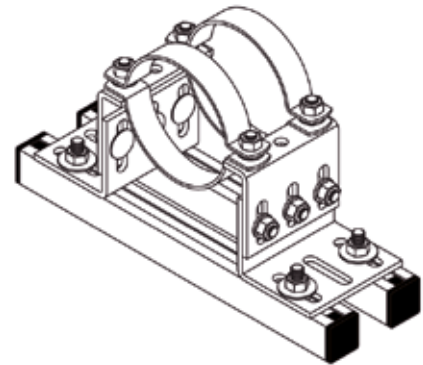


Free slidable elevation

STATO® Brackets 1 kit consisting of:
 4 STATO® Angle pieces,
 6 Coach bolts M12,
 6 Hexagonal nuts M12,
 6 Washers for M12.
 All parts are hot-dip galvanised.

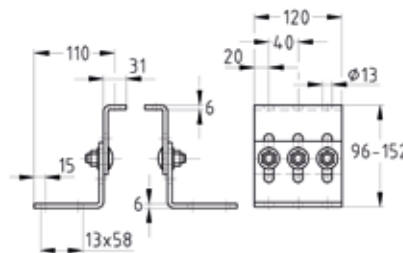


Standard version

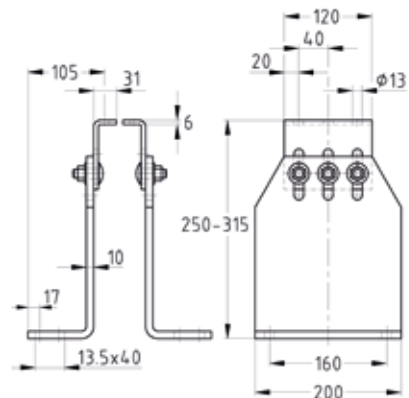


Heavy-duty version, larger distance from structure

Design	Overall height [mm]	Adjustment range [mm]	Part no.	Sales unit	Pack unit
Standard version	96 - 152	56	129168	5	Pieces
Heavy-duty version	250 - 315	65	129172	1	

 STATO® Clamps in hot-dip galvanised version upon request.

STATO® Brackets

hot-dip galvanised

Features				
Design		Standard version	Heavy-duty version	Tightening torque [Nm] valid for M12, steel pipes without coating
Max. recommended load [N] 	axial	5,500 per clamp	5,500 per clamp	75
	cross	Overall height min.		
		8,000	7,000	
		Overall height max.		
	radial	6,000	7,000	
		25,000	25,000	

