

### Pipe slides type THV-2


with two pipe clamps, DIN 3567

#### Application


- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For fastening piping with slope or consistent centre line

#### Your advantages

- Individual adjustment of the distance between the pipe clamp and sub-construction on the building site
- Compensation for height tolerances and unevenness in the subconstruction
- Slope adjustment axial direction up to 10°
- Hot-dip galvanised, suitable for outdoor use

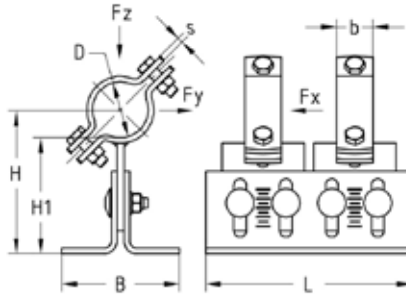

Type	Adjustment range [mm]	Nominal size DN	Pipe outer Ø D [mm]	Dimensions [mm]						Loading			Weight [kg]	Part no.	Sales unit	Pack unit
				b	s	B	H	H1	L	Fx [kN]	Fy [kN]	Fz [kN]				
THV-2-100 W37-OF-SF 33.7	100 - 140	25	33.7	30	5	128	117 - 157	100 - 140	225	7.2	4.6	16	4.54	169670	1	Pieces
THV-2-100 W37-OF-SF 42.4		32	42.4				122 - 162			7	4.5	4.61	169671			
THV-2-100 W37-OF-SF 48.3		40	48.3	125 - 165	6.8	4.4	4.65	169672								
THV-2-100 W37-OF-SF 60.3		50	60.3	40	6	132 - 172	101 - 141	6.6	4.2	5.35	169673					
THV-2-100 W37-OF-SF 76.1		65	76.1					140 - 180	6.3	4	5.59	169674				
THV-2-100 W37-OF-SF 88.9		80	88.9	146 - 186	6.1	3.9	5.67	169675								
THV-2-100 W37-OF-SF 114.3		100	114.3	50	8	161 - 201	103 - 143	5.7	3.6	7.75	169676					
THV-2-100 W37-OF-SF 139.7		125	139.7					173 - 213	5.3	3.4	8.25	169677				
THV-2-100 W37-OF-SF 168.3		150	168.3	188 - 228	5	3.2	8.8	169678								
THV-2-100 W37-OF-SF 193.7		175	193.7	200 - 240	4.7	3	9.3	169679								
THV-2-100 W37-OF-SF 219.1	200	219.1	213 - 253	4.5	2.9	9.81	169680									
THV-2-140 W37-OF-SF 33.7	140 - 180	25	33.7	30	5	157 - 197	140 - 180	225	5.7	3.6	4.99	169681				
THV-2-140 W37-OF-SF 42.4		32	42.4						162 - 202	5.6	5.06	169682				
THV-2-140 W37-OF-SF 48.3		40	48.3	165 - 205	5.5	3.5	5.1	169683								
THV-2-140 W37-OF-SF 60.3		50	60.3	40	6	172 - 212	141 - 181	5.3	3.4	5.8	169684					
THV-2-140 W37-OF-SF 76.1		65	76.1					180 - 220	5.1	3.3	5.97	169685				
THV-2-140 W37-OF-SF 88.9		80	88.9	186 - 226	5	3.2	6.12	169686								
THV-2-140 W37-OF-SF 114.3		100	114.3	50	8	201 - 241	143 - 183	4.7	3	8.2	169687					
THV-2-140 W37-OF-SF 139.7		125	139.7					213 - 253	4.5	2.9	8.7	169688				
THV-2-140 W37-OF-SF 168.3		150	168.3	228 - 268	4.2	2.7	9.25	169689								
THV-2-140 W37-OF-SF 193.7		175	193.7	240 - 280	4.1	2.6	9.75	169690								
THV-2-140 W37-OF-SF 219.1	200	219.1	253 - 293	3.9	2.5	10.26	169691									
THV-2-180 W37-OF-SF 33.7	180 - 220	25	33.7	30	5	197 - 237	180 - 220	225	4.7	3	5.44	169692				
THV-2-180 W37-OF-SF 42.4		32	42.4						202 - 242	5.51	169693					
THV-2-180 W37-OF-SF 48.3		40	48.3	205 - 245	4.6	2.9	5.56	169694								
THV-2-180 W37-OF-SF 60.3		50	60.3	40	6	212 - 252	181 - 221	4.5	2.8	6.25	169695					
THV-2-180 W37-OF-SF 76.1		65	76.1					220 - 260	4.3	2.8	6.42	169696				
THV-2-180 W37-OF-SF 88.9		80	88.9	226 - 266	4.2	2.7	6.57	169697								
THV-2-180 W37-OF-SF 114.3		100	114.3	50	8	241 - 281	183 - 223	4	2.6	8.65	169698					
THV-2-180 W37-OF-SF 139.7		125	139.7					253 - 293	3.9	2.5	9.15	169699				
THV-2-180 W37-OF-SF 168.3		150	168.3	268 - 308	3.7	2.4	9.7	169700								
THV-2-180 W37-OF-SF 193.7		175	193.7	280 - 320	3.5	2.3	10.21	169701								
THV-2-180 W37-OF-SF 219.1	200	219.1	293 - 333	3.4	2.2	10.71	169702									

 For fixing the height adjustment a tightening torque of 75 Nm for the carriage bolts need to be considered.