



### Duct joint clamps

#### Application

- Simple and quick flange connection for large cross-section ducts and high pressure conditions

#### Your advantages

- No pre-clamping or drilling required
- Supplied with hexagon head bolt already inserted
- High load capacity due to reinforcing rib

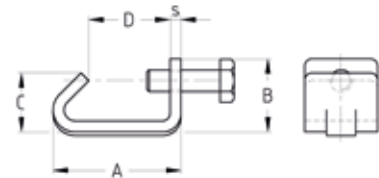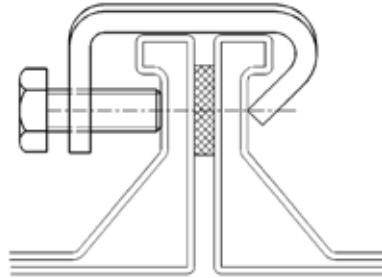

Design	Length [mm]	Hexagon head bolt	Dimensions [mm]					Part no.	Sales unit	Pack unit
			A	B	C	D	s			
galvanised	35	M8 x 20 mm	35	20	17	23	3	116570	100	Pieces
	31		31	23		18	4	116576		
	35	M8 x 25 mm	35	20		23	3	116573	1	
V2A	33	M8 x 20 mm	33	18	14			116567	100	

**!** Normally recommended spacing 300-400 mm. For ducts with a side length of less than 800 mm, one clamp needs to be mounted in center of each side.

### Self-drilling screws

DIN 7504, with hexagonal head, for the attachment of air pipes, ducts, spiral-seam pipes, without pre-drilling, galvanised

Sheet metal thread G [mm]	Length L [mm]	Screw head diameter [mm]	Spanner width [mm]	Part no.	Sales unit	Pack unit
4.2	13	8.5	7	106661	500	Pieces
	16			106663		
	19			106665		
	22			106666		
	4.8			13		
16	106670					
19	106671					
38	106672					
5.5	32	10.5		106673		
6.3	16	12.7	10	106674		
	25			106675		
	32			106676		
	45			106677		

