

Single bossed clamps

with DÄMMGULAST® black, hot-dip galvanised

Application

- Suitable for fixings in industrial areas
- Suitable for fastening of drinking water and heating pipes
- Suitable for outdoor use

Your advantages

- Positive-fit vibration control lining DÄMMGULAST® with clip-over edges that prevent the lining from slipping out of the clamp


- Average vibration reduction up to 21 dB(A)
- Excellent corrosion resistance
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Connecting thread with combithread M8/M10



Features



Size	Max. recommended load [N]
3/8" - 2"	1,200
70 - 102 mm	1,900
4" - 133 mm	2,300
5" - 6"	2,700

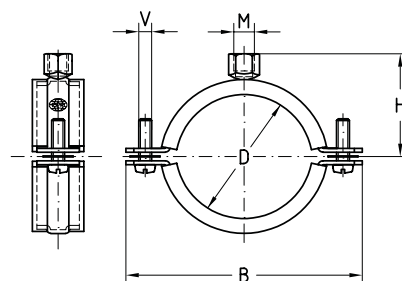

Connecting thread M	Size		Clamping range [mm]	b1	Dimensions [mm]				V	Part no.	Sales unit	Pack unit
	[inch]	[mm]			B	H	H1					
M8/M10	3/8"		15 - 20	18	54	36.5	45	M6	177547	200	Pieces	
	1/2"		21 - 25		60	42.5	51		177548			
	3/4"		25 - 30		63	46.5	55		177549			
	1"		32 - 37		70	54.5	63		177550			
	1 1/4"		40 - 45		80	61.5	70		177551			
	1 1/2"		46 - 53		87	69.5	78		177552			
		57	54 - 58		94	75.5	84		177553			
	2"		59 - 63		98	80.5	89		177554			
		70	63 - 70		20	106	88.5		97			177555
	2 1/2"		72 - 78		113	96.5	105		177556			
		83	78 - 86	123	104.5	113	177557					
	3"		87 - 93	129	111.5	120	177558					
		102	98 - 104	140	122.5	131	177559					
	4"		108 - 115	158	135.5	144	177560					
		116	114 - 118	159	139.5	148	177561					
		120	119 - 123	168	144.5	153	177562					
		125	124 - 130	183	150.5	159	M8	177563				
		133	132 - 137	190	156.5	165	177564					
	5"		137 - 142	25	199	166.5	175	177565				
		145	143 - 150	209	174.5	183	177566					
	155	151 - 158	215	182.5	191	177567						
	160	159 - 163	221	187.5	196	177568						
6"		164 - 168	228	192.5	201	177569						

